




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04J 13/04, H04B 1/707		A1	(11) International Publication Number: WO 99/03225
			(43) International Publication Date: 21 January 1999 (21.01.99)
(21) International Application Number: PCT/SE98/01318 (22) International Filing Date: 3 July 1998 (03.07.98) (30) Priority Data: 08/890,794 11 July 1997 (11.07.97) US (71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE). (72) Inventors: OVESJÖ, Fredrik; Ankdammsgatan 36, S-171 67 Solna (SE). DAHLMAN, Erik; Tackjärnsvägen 12, S-168 68 Bromma (SE). (74) Agent: ERICSSON RADIO SYSTEMS AB; Common Patent Dept., S-164 80 Stockholm (SE).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>	

(54) Title: RATE DETECTION FOR VARIABLE RATE CDMA COMMUNICATION SYSTEM

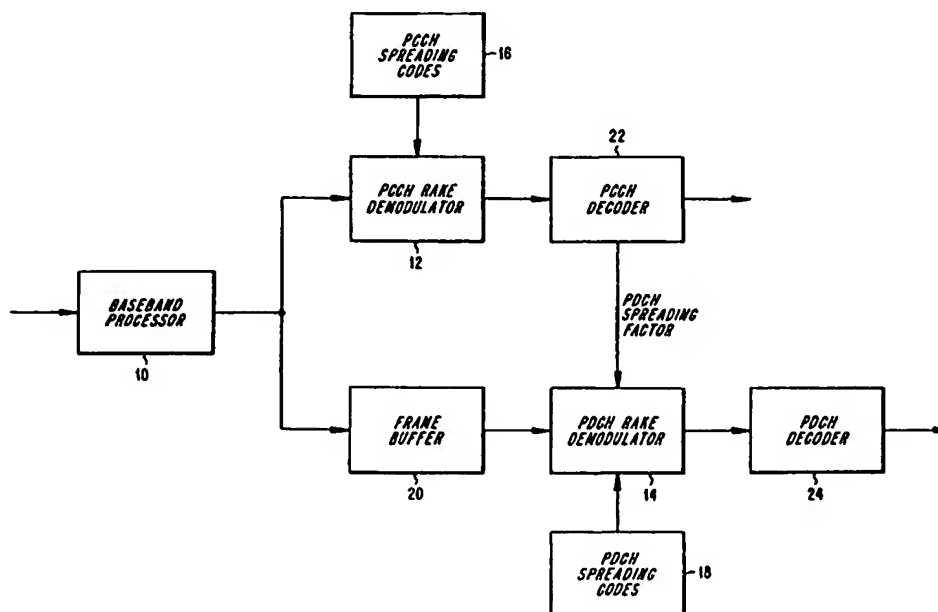

(57) Abstract

Variable rate data transmissions are accommodated having BRI transmitted in the same frame as the data itself. When Walsh code spreading is employed, the despreading process can be split into two separate despreading operations, with buffering between the two operations. Buffering is made of the intermediate symbols between the despreading stages, and can be made at the maximum user data rate instead of the much higher chip rate. In this way, the size of the buffer in the receiver can be significantly reduced.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

RATE DETECTION FOR VARIABLE RATE CDMA COMMUNICATION SYSTEM

BACKGROUND

5 This invention generally relates to variable data rate transmissions and, more particularly, to techniques for efficiently detecting variable rate data transmission when explicit bit rate information is transmitted.

Cellular radio communication systems have recently been developed that use spread spectrum modulation and code division multiple access (CDMA) techniques.

10 In a typical CDMA system, an information data stream to be transmitted is superimposed on a much-higher-bit-rate data stream sometimes known as a spreading code. Each symbol of the spreading code is commonly referred to as a chip. The information signal and the spreading code signal are typically combined by multiplication in a process sometimes called coding or spreading the information

15 signal. Each information signal is allocated a unique spreading code. A plurality of coded information signals are transmitted as modulations of radio frequency carrier waves and are jointly received as a composite signal at a receiver. Each of the coded signals overlaps all of the other coded signals, as well as noise-related signals, in both frequency and time. By correlating the composite signal with one of the

20 unique spreading codes, the corresponding information signal can be isolated and decoded.

As radiocommunication becomes more widely accepted, it will be desirable to provide various types of radiocommunication services to meet consumer demand. For example, support for facsimile, e-mail, video, internet access, etc. via

25 radiocommunication systems is envisioned. Moreover, it is expected that users may wish to access different types of services at the same time. For example, a video conference between two users would involve both speech and video support. Some of these different services will require relatively high data rates compared with speech service that has been conventionally supplied by radio communication

systems, while other services will require variable data rate service. Thus, it is anticipated that future radio communication systems will need to be able to support high data rate communications as well as variable data rate communications.

Several techniques have been developed to implement variable rate communications in CDMA radio communication systems. From the perspective of transmitting data at varying rates, these techniques include, for example, discontinuous transmission (DTX), variable spreading factors, multi-code transmission and variable forward error correction (FEC) coding. For systems employing DTX, transmission occurs only during a variable portion of each frame, i.e., a time period defined for transmitting a certain size block of data. The ratio between the portion of the frame used for transmission and the total frame time is commonly referred to as the duty cycle γ . For example, when transmitting at the highest possible rate, i.e., during the entire frame period, $\gamma = 1$, while for zero rate transmissions, e.g., during a pause in speech, $\gamma = 0$. DTX is used, for example, to provide variable data rate transmissions in systems designed in accordance with the U.S. standard entitled "Mobile Station-Base Station Compatibility Standard for Dual-Mode Wideband Spread Spectrum Cellular System", TIA/EIA Interim Standard TIA/EIA/IS-95 (July 1993) and its revision TIA/EIA Interim Standard TIA/EIA/IS-95-A (May 1995). Such standards that determine the features of U.S. cellular communication systems are promulgated by the Telecommunications Industry Association and the Electronic Industries Association located in Arlington, Virginia.

Varying the spreading factor is another known technique for providing variable data rate communication. As mentioned above, spread spectrum systems spread data signals across the available bandwidth by multiplying each of the data signals with spreading codes. By varying the number of code symbols or chips per data symbol, i.e., the spreading factor, while keeping the rate of the code symbols fixed, the effective data rate can be controllably varied. In typical implementations of the variable spreading factor approach, the spreading factor is limited by the

relationship to $SF = 2^k \times SF_{min}$ where SF_{min} is the minimum allowed spreading factor corresponding to the highest allowed user rate.

Another known technique for varying the transmitted data rate is commonly referred to as multi-code transmission. According to this technique, data is transmitted using a variable number of spreading codes where the exact number of codes used depends on the instantaneous user bit rate. An example of multi-code transmission is described in U.S. Patent Application Serial No. 08/636,648 entitled "Multi-Code Compressed Mode DS-CDMA Systems and Methods", filed on April 23, 1996, the disclosure of which is incorporated here by reference.

Yet another technique for varying the transmitted data rate in radio communication systems involves varying the FEC. More specifically, the rate of the forward error correction (FEC) coding is varied by using code-puncturing and repetition or by switching between codes of different rates. In this way the user rate is varied while the channel bit rate is kept constant. Those skilled in the art will appreciate the similarities between varying the FEC and a variable spreading factor as mechanisms to implement variable rate transmission.

Regardless of the particular technique adopted in a radiocommunication system for providing variable rate transmission capability, the receiver must know the particular data rate at which a signal is transmitted in order to properly detect and decode the received signal. Methods for informing the receiver of the instantaneous data rate of a received signal generally fall into two categories, systems which explicitly transmit bit rate information (BRI) along with the transmitted signal, and systems which provide the receiver with the capability to "blindly" determine the rate at which data has been transmitted, e.g., by trying different rates and looking for a correct cyclic redundancy check (CRC). U.S. Patent No. 5,566,206 to Butler et al. provides an example of blind rate detection.

Both the transmission of explicit BRI and blind rate detection approaches have certain drawbacks. For example, blind rate detection results in relatively

complex receivers due to the additional circuitry/logic needed to correctly identify one of a plurality of possible data transmission rates.

The transmission of explicit BRI also creates design issues. For example, the BRI can either be sent in the data frame before the data frame that it describes or in the same frame that it describes. If the BRI is transmitted in the previous frame, an extra delay of one frame will be introduced in the transmitter. That is, as soon as the data for a frame is available in the transmitter, the BRI for that frame is computed and transmitted, while the transmission of that data frame is delayed until the next frame period. This extra delay can be undesirable for low-delay services like speech, especially for large frame lengths.

On the other hand, if the BRI is transmitted in the same frame as the data, the receiver needs to buffer the received signal until it has detected and decoded the BRI for that frame. This solution leads to extra buffering in the receiver, and therefore additional cost and complexity.

Accordingly, it would be desirable to create new techniques and systems for allowing explicit rate information to be transmitted in the same frame that it describes, while minimizing the amount of buffering needed in the receiver.

SUMMARY

These and other problems of previous communication systems are solved by Applicants' invention, wherein variable rate data transmissions which use a variable spreading factor are accommodated having BRI transmitted in the same frame as the data itself. When Walsh code spreading is employed, the despreading process can be split into two separate despreading stages, with buffering between the two stages. Buffering can then be made at the maximum user data rate instead of the much higher chip rate. In this way, the size of the buffer can be significantly reduced.

At a first despreading stage, despreading can be performed using a first code which is common to all physical channels based upon the maximum user data rate and the property of Walsh code words that codes stem from common roots. After

the BRI is decoded, e.g., from a physical control channel, this information is then provided to a second despreading stage which determines the individual code words associated with each physical channel to be decoded.

5

BRIEF DESCRIPTION OF THE DRAWINGS

The features and objects of Applicants' invention will be understood by reading this description in conjunction with the drawings, in which:

FIG. 1 is a block diagram representation of an exemplary receiver structure in which the present invention can be implemented;

10

FIG. 2 illustrates variable spreading on two physical channels with common scrambling;

FIG. 3 is an exemplary code tree;

FIG. 4 illustrates two stage despreading according to an exemplary embodiment of the present invention; and

15

FIG. 5 illustrates a more detailed version of the block diagram of FIG. 4.

DETAILED DESCRIPTION

While this description is written in the context of cellular communications systems involving portable or mobile radio telephones, it will be understood by those skilled in the art that Applicants' invention may be applied to other communications applications.

20

According to exemplary embodiments of the present invention, CDMA systems can support variable bit rate services, such as speech, by providing control information in each frame which specifies the instantaneous data symbol rate for that frame. In order to accomplish this in a regular time interval, physical channels can be organized in frames of equal length. Each frame carries an integer number of chips and an integer number of information bits.

25

Using this exemplary frame structure, bit rate control information can be provided for every CDMA frame by transmitting this information on a separate

physical channel. The physical channels carrying the data and the control information can be denoted as physical data channel (PDCH) and physical control channel (PCCH), respectively. The spreading code, symbol rate, or equivalently spreading factor, of the PCCH are known a priori to the receiver.

5 Many potential advantages are attributable to variable rate transmission. For example, interference can be reduced for various users of the system since the chip rate is kept constant and a lower bit rate gives a higher spreading factor, thus allowing a lower transmit power. Those skilled in the art will readily appreciate how this ability to vary the information rate in a CDMA system can be used
10 advantageously to vary other parameters.

The structure of an exemplary receiver (usable, e.g., in either a base station or a mobile station) is illustrated in Figure 1. The received signal is first processed to produce complex baseband samples by processor 10. Then the signal is distributed to signal processing branches including the control channel and data
15 channel RAKE demodulators 12 and 14, respectively. Although only one PDCH signal processing branch is illustrated in Figure 1, those skilled in the art will appreciate that a plurality of these branches can be included in receivers according to the present invention. The demodulators 12 and 14 are also provided with the corresponding spreading codes for the PCCH and PDCH by units 16 and 18. As
20 described above, a PCCH frame contains relevant information about the structure of the concurrently transmitted PDCH and, therefore, the PCCH information is to be decoded before the PDCH can be demodulated. Thus, a frame buffer 20 upstream of the PDCH RAKE demodulator 14 delays input of the baseband signal thereto so that the PDCH RAKE demodulator 14 receives the spreading factor of the PDCH
25 prior to decoding. This information related to the rate at which data was transmitted in the PDCH on a frame-by-frame basis is provided by PCCH decoder 22. A PDCH decoder 24 is also provided downstream for decoding of the PDCH as is well known in the art. The size of frame buffer 20 can be minimized in accordance with exemplary embodiments of the present invention as described below.

In order to fully appreciate how the size of buffer 20 can be reduced, a brief discussion of variable spreading factors and orthogonal codes is first provided. As mentioned above, variable rate services can be supported through spreading a data stream with a variable spreading factor. For example, consider a service which
5 requires a first (lower) data rate during a first period and a second (higher) data rate during a second period and which is being supported using one PDCH between a mobile station and a base station. During the first period, a first spreading code can be selected based upon the first data rate. During the second period, a second spreading code can be selected for spreading frames to be transmitted at the second
10 data rate. Since the second data rate is higher than the first data rate, the second spreading code will be shorter than the first spreading code.

Moreover, a plurality of variable rate PDCHs can be handled in a similar manner. For example, a number of data streams can be spread to the chip rate using Walsh codes of different length, followed by summation and scrambling. Figure 2
15 depicts these spreading and scrambling operations, exemplified for two physical channels. Therein, a first data stream is supplied to multiplier 30 having a data rate of R_1 which is equal to the chip rate R_c divided by the spreading factor SF_1 for that data stream. This data stream is spread with a code word C_1 having a length which is selected such that the output of multiplier 30 is a physical channel at the chip rate
20 R_c . Similarly, a second data stream is supplied to multiplier 32 having a second data rate R_2 which is equal to the chip rate R_c divided by a second spreading factor SF_2 . This data stream is spread with a second code word C_2 having a length which is selected to result in a physical channel at the chip rate R_c . The two physical channels are summed at summer 34 and then the composite signal is scrambled with
25 a scrambling code C_{scr} at block 36. The resultant signal is output, e.g., to transmit signal processing circuitry and ultimately coupled to an antenna. The rate of the data streams can be limited to such an interval that the spreading factors used are larger or equal to a predetermined SF_{min} .

The Walsh codes used for spreading at multipliers 30 and 32 can be viewed in a tree like manner, as illustrated in Figure 3. Codes on the same level in the tree are orthogonal and have the same spreading factor. If a physical channel is spread with a first code in the tree, and another physical channel is spread with another code which is (1) not the same as the first code, (2) not to the left of the first code on the path to the root of the tree and (3) not in the subtree which has the first code as the root, the spread physical channels will be orthogonal. Every physical channel is allocated a spreading code from the tree, with spreading factors matching the respective data rates. As the data rate varies for a particular PDCH, a code from a different level of the tree will be allocated. For example, increasing data rates will cause code selection to move to the left in the tree, while for decreasing data rates code selection will move to the right. Thus, a typical variable rate PDCH will typically move up and down along a certain path in the code tree as its data rate varies.

It can be seen in Figure 3 that any given code in the tree is used to construct the codes to the right of it (i.e., further from the root). Thus, any given code can be seen as consisting of lower level codes that are on the way to the root of the code tree. Applicants have recognized that this code property can be used to reduce buffering requirements in the receiver.

In the receiver described with respect to Figure 1, the received signal is descrambled and despread. However, before despreding a frame the receiver needs to know the spreading factor used for transmission of that frame. Since the BRI is transmitted in the same frame according to exemplary embodiments of the present invention, the signal needs to be buffered. However, Applicants have recognized that despreding with the largest common part of all Walsh codes that are available for a particular connection set up can be performed without buffering, i.e., before the BRI is decoded. Accordingly, the branch of the receiver illustrated in Figure 1 that includes buffer 20 and PDCH RAKE demodulator 14 can be modified as illustrated in Figure 4. Therein, the signal is correlated with a first code at the root

of the subtree in which all possible codes are found at block 50 to partially despread the received symbols. This process is performed for all multipath rays, RAKE combining is done and the intermediate symbols obtained are buffered in buffer 20. Once the BRI has been decoded by the PCCH decoder 22 the intermediate symbols from buffer 20 are correlated with a second code at block 52 to get the despread raw bits. The code used for the second step of the desreading is easily identified from the code tree. For example, desreading the code $(+1 +1 -1 -1 -1 +1 +1)$ can be implemented by first desreading with $(+1 +1)$ at block 50 followed by desreading with $(+1 -1 -1 +1)$ at block 52. Another alternative is desreading with $(+1 +1 -1 -1)$ at block 50 followed by $(+1 -1)$ at block 52. The former combination results in buffering intermediate symbols at a higher rate, and hence needs a larger buffer 20. In either case, however, buffering in accordance with the present invention is made at a rate significantly lower than the chip rate. For example, in a system using a variable spreading factor between 64 and 256, buffering is made at a rate 64 times lower than the chip rate.

Figure 5 depicts an exemplary desreading process according to the present invention for two codes in a two finger RAKE receiver. First, at blocks 60 and 62, the received signal is descrambled to reverse the process which was performed in block 36 of Figure 2. Then, at block 64 and 66, the received signal is partially despread using the common code, i.e., the code at the leftmost portion of the code tree which is common to all of the variable spreading factor options for this particular transmission. The resulting partially despread signals are integrated at blocks 68 and 70, respectively, and modified based upon the channel estimates at blocks 72 and 74. These latter two operations are well known to those skilled in the art with respect to RAKE receiver signal processing. The resultant, partially despread signals are then summed at block 76 and introduced to buffer 20 wherein they are stored until the bit rate information can be provided from the PCCH decoder. Since, however, the signals have been partially despread before being stored in buffer 20, the data rate of storage is much lower than the chip rate,

providing the designer with the opportunity to reduce the size of buffer 18. Once the BRI information is available for this frame, then the second codes C_1'' and C_2'' can be selected to complete the despread operation at blocks 78 and 80, respectively. Again, the despread signals are integrated at blocks 82 and 84 and subsequent processing is performed as is well known in conventional RAKE receivers.

It will be understood that Applicants' invention is not limited to the particular embodiments described above and that modifications may be made by persons skilled in the art. The scope of Applicants' invention is determined by the following claims, and any and all modifications that fall within that scope are intended to be included therein.

We Claim:

1. A receiver comprising:
means for receiving a spread spectrum signal including at least two
physical channels;
5 means for partially despreading one of said at least two physical
channels using a first code;
means for buffering said partially despread signal; and
means for despreading said buffered signal using a second code.
- 10 2. The receiver of claim 1, wherein said spread spectrum signal is
received at a chip rate and said means for buffering stores said partially despread
signal at less than said chip rate.
- 15 3. The receiver of claim 1, wherein said at least two physical channels
include a control channel and a first data channel.
- 20 4. The receiver of claim 1, wherein said one of said at least two physical
channels can be received at any of a plurality of data rates and said first code is
selected based upon said plurality of data rates.
- 25 5. The receiver of claim 3, further comprising:
means for demodulating and decoding said control channel to obtain
bit rate information associated with said first data channel; and
means for supplying said bit rate information to said means for
despreading said buffered signal using at least a second code.
6. The receiver of claim 5, wherein said second code is selected based
upon said bit rate information.

7. The receiver of claim 3, wherein said at least two physical channels further include a second data channel.

8. The receiver of claim 7, wherein said means for partially despreading
5 also despreads said second data channel using said first code.

9. The receiver of claim 8, further comprising:
means for demodulating and decoding said control channel to obtain bit rate
information associated with each of said first and second data channels; and
10 wherein said despreading means selects said second code and a third code for
despreading said first and second data channels, respectively, based upon said bit
rate information.

10. The receiver of claim 9, wherein said bit rate information includes
15 spreading factors for each of said first and second data channels.

11. The receiver of claim 5, wherein said bit rate information is a
spreading factor.

12. The receiver of claim 8, wherein said first code is selected based
20 upon code bits which are common to said first and second data channels.

13. A method for despreading a data frame comprising the steps of:
(a) despreading said data frame using a first code;
25 (b) buffering an output of step (a);
(c) determining a rate at which said data frame was transmitted; and
(d) despreading said buffered output using a second code, said second
code selected based upon said determined rate.

14. The method of claim 13, wherein step (b) further comprises the step of:

buffering said output at a rate that is less than a chip rate of said data frame.

5

15. The method of claim 13, wherein step (c) further comprises the step of:

obtaining said rate by despread and decoding a control channel.

10

16. The method of claim 13, wherein step (a) further comprises the step of:

determining said first code based upon a plurality of rates at which said data frame can be transmitted.

15

17. A receiver comprising:

a first despread for despread a received spread spectrum signal;

a buffer connected to said first despread for storing an output

thereof; and

a second despread, connected to said buffer, for despread said

20

stored output.


18. The receiver of claim 17, wherein said first despread despread said received spread spectrum signal using at least two branches, each branch using a same first code to despread said received spread spectrum signal.

25

19. The receiver of claim 17, wherein said second despread despread said stored output using at least two branches, each branch using a code which is different from other codes used in said at least two branches.

20. The receiver of claim 17, wherein said first despreader descrambles said received spread spectrum signal using a scrambling code.

Fig. 1

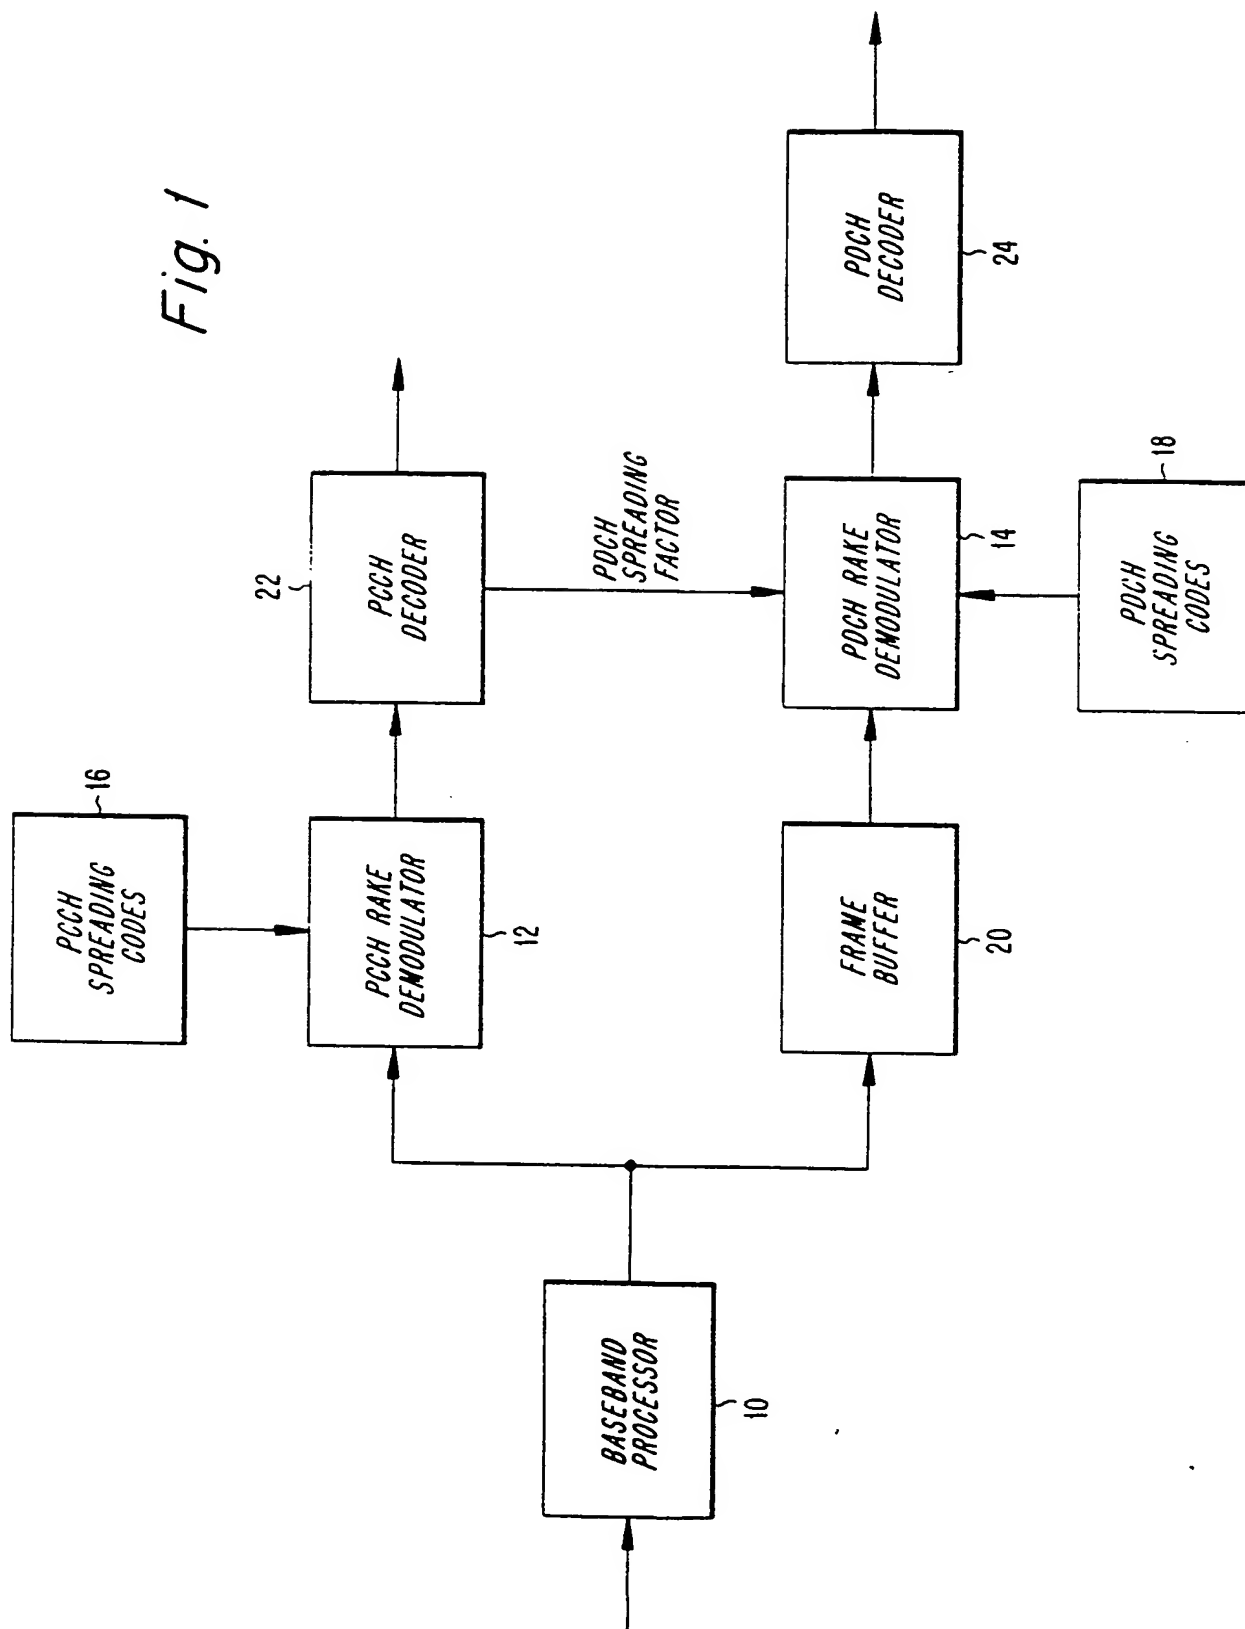

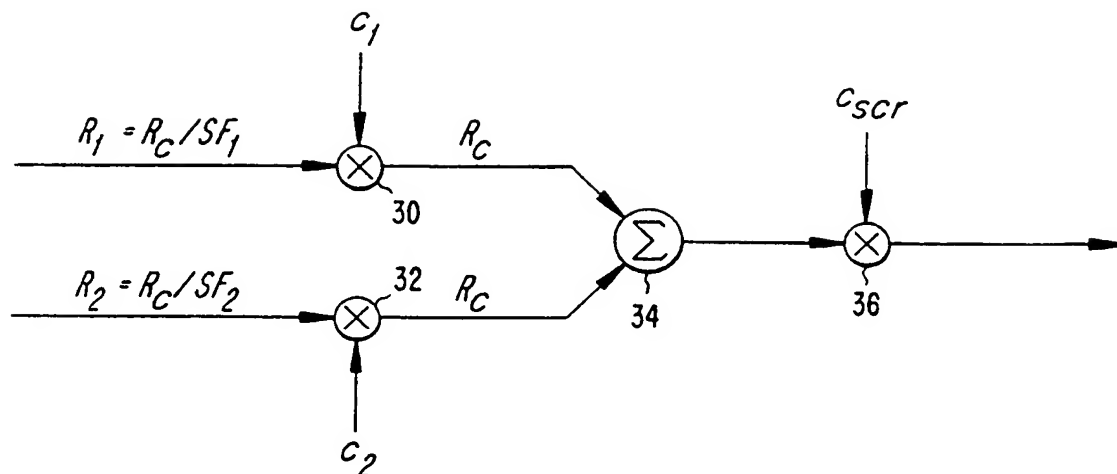


Fig. 2

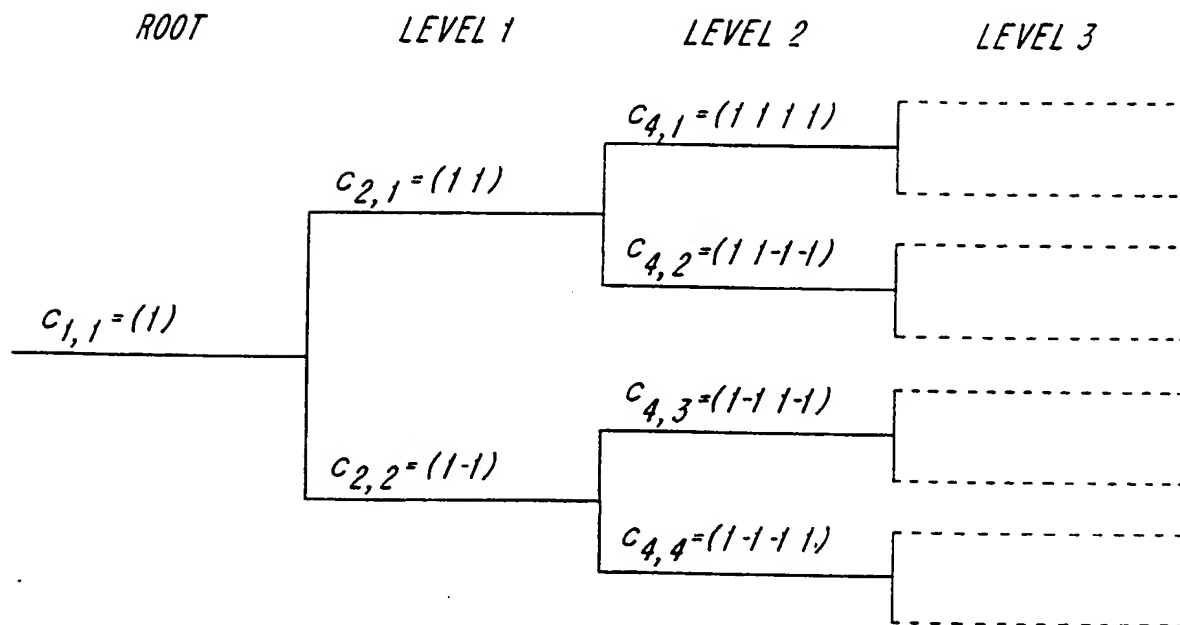


Fig. 3

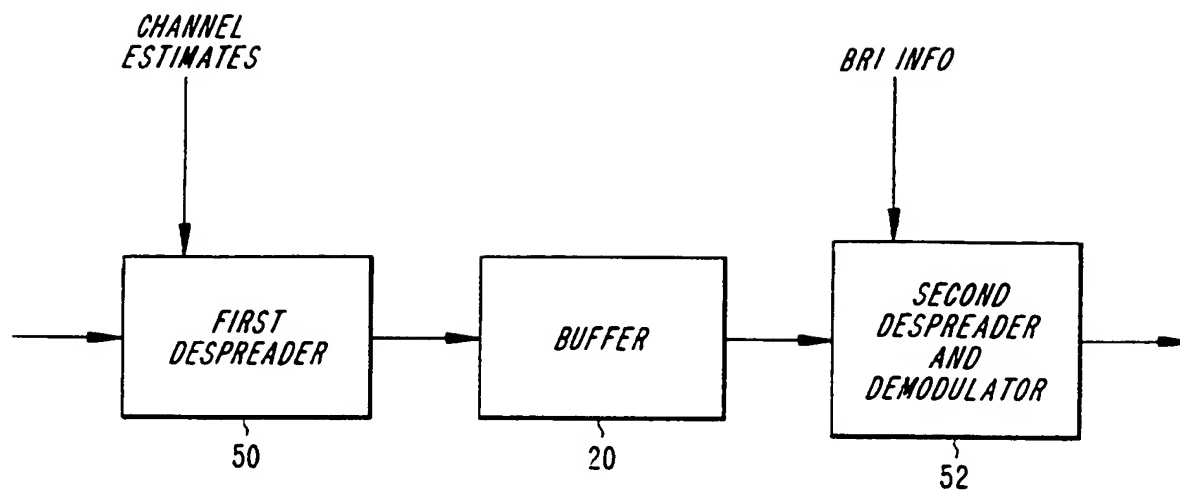


Fig. 4

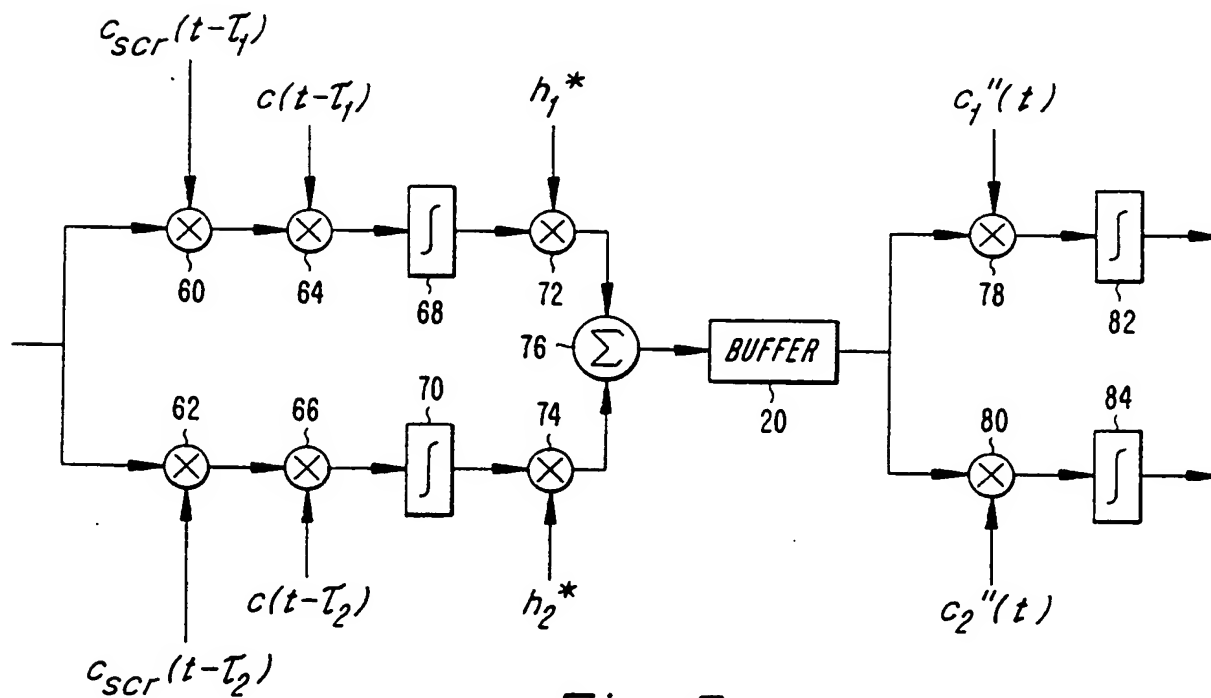


Fig. 5

INTERNATIONAL SEARCH REPORT

International Application No

PCT/SE 98/01318

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H04J13/04 H04B1/707

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04J H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 544 156 A (TEDER PAUL M ET AL) 6 August 1996 see column 2, line 40 - column 3, line 22 see column 4, line 6 - line 44; figure 1 ---	1,3-5, 13,17
A	US 5 309 474 A (GILHOUSEN KLEIN S ET AL) 3 May 1994 see column 18, line 23 - column 19, line 10; figure 4A see column 31, line 30 - column 32, line 14; figure 10 ---	1,3-5, 13,17
A	EP 0 680 159 A (AT & T CORP) 2 November 1995 see abstract see page 4, column 6, line 3 - line 14; figure 2D -----	1,13,17

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

21 October 1998

Date of mailing of the international search report

26/10/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Bossen, M

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/SE 98/01318

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5544156 A	06-08-1996	AU 2422895 A	29-11-1995
		BR 9507529 A	02-09-1997
		CA 2188869 A	09-11-1995
		CN 1147321 A	09-04-1997
		EP 0758504 A	19-02-1997
		FI 964344 A	28-10-1996
		JP 10504143 T	14-04-1998
		NZ 285198 A	27-07-1997
		WO 9530289 A	09-11-1995
US 5309474 A	03-05-1994	US 5103459 A	07-04-1992
		US 5715236 A	03-02-1998
		AU 652956 B	15-09-1994
		AU 8401691 A	23-01-1992
		BG 61514 B	31-10-1997
		BG 97222 A	27-05-1994
		CA 2085890 A	26-12-1991
		CN 1061312 A	20-05-1992
		CZ 283123 B	14-01-1998
		EP 0536334 A	14-04-1993
		FI 925812 A	21-12-1992
		HU 64657 A	28-01-1994
		IL 98598 A	27-02-1994
		JP 6501349 T	10-02-1994
		MX 173818 B	29-03-1994
		PT 98079 A	31-08-1993
		SK 387192 A	10-08-1994
		WO 9200639 A	09-01-1992
		US 5511073 A	23-04-1996
		US 5504773 A	02-04-1996
		US 5659569 A	19-08-1997
		US 5535239 A	09-07-1996
		US 5629955 A	13-05-1997
		US 5568483 A	22-10-1996
		US 5416797 A	16-05-1995
EP 0680159 A	02-11-1995	US 5671218 A	23-09-1997
		CA 2145705 A	29-10-1995
		JP 7303093 A	14-11-1995
		US 5784360 A	21-07-1998

THIS PAGE BLANK (USPTO)